
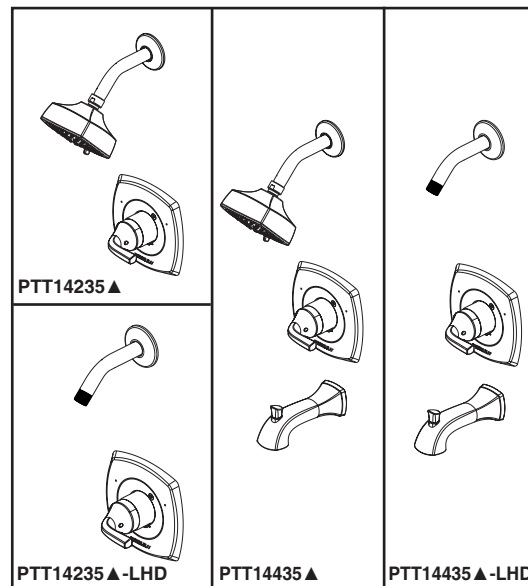


PEERLESS®

PTT14235▲
PTT14435▲
PTT14235▲-LHD
PTT14435▲-LHD

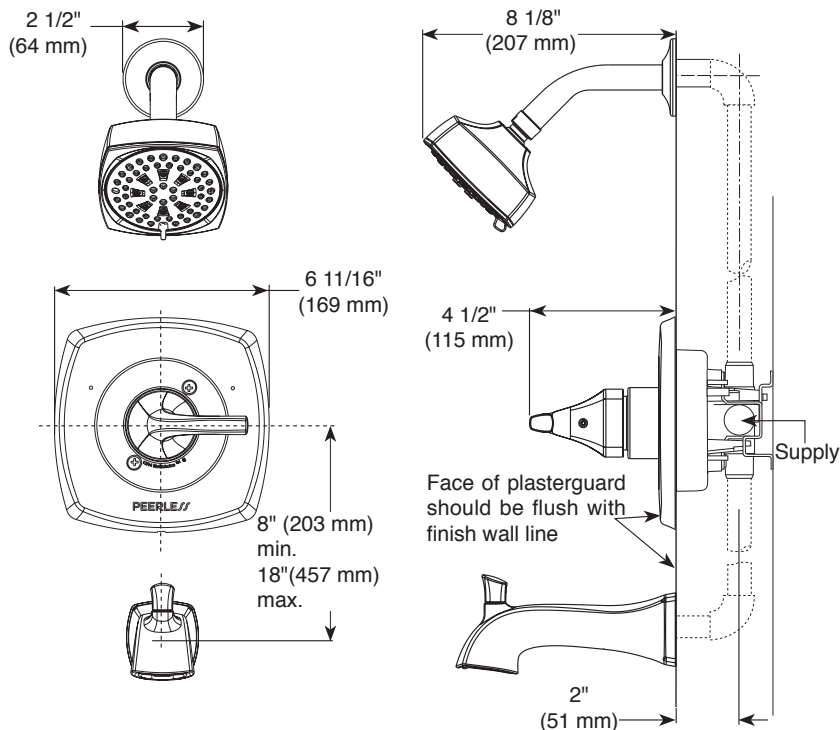

TUB AND SHOWER FAUCET TRIM

- Parkwood™ Collection
- Shower Only
(PTT14235▲ & PTT14235▲-LHD)
- Tub/Shower
(PTT14435▲ & PTT14435▲-LHD)


STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body (R10000 Series); not included.
- Back-to-back installation capability.
- Temperature only controlled with handle rotating a maximum of 120° from full cold to the full hot.
- Cartridge utilizes integral check valve to prevent the cross flow of water within the valve.
- Shower head maximum flow rate 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- Easy-turn 6-spray setting shower head.
- Slip-on tub spout.


WARRANTY:

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

RP100987▲ 1.5 GPM



RP100986▲

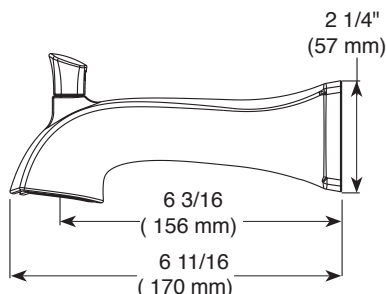

Spray Pattern



Full Body
Spray



Massage
Spray



Shampoo
Rinse Spray



Full Spray
w/ Massage



Shampoo Rinse
w/ Full Spray



Pause

▲ Designate proper finish suffix

PSP-B-PTT14435 Rev. A



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® (Applies to PTT14235, PTT14435 & RP100987 only)



Indicates compliance to
ICC/ANSI A117.1 - Valve control only