

TOTO®

MW4543056CUFG(A)

Drake® II 1G® / WASHLET®+ S550e Two-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency TORNADO FLUSH® (1.0GPF/3.8LPF)
- CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Chrome trip lever
- 12" Rough-in, supply line sold separately
- See Spec sheet SW3056AT40 for WASHLET features

MODELS & COMPONENTS

- **MW4543056CUFGA#01**
With CEFIONTECT ceramic glaze, WASHLET+ S550e and Auto Flush
 - **C454CUFGT40**
Elongated bowl with CEFIONTECT
 - **ST453UA**
Tank and cover only
 - **SW3056AT40**
WASHLET+ S550e
 - **THU766**
Auto Flush Kit
- **MW4543056CUFG#01**
Same as **MW4543056CUFGA** without Auto Flush
 - **C454CUFGT40**
Elongated bowl with CEFIONTECT
 - **ST453UA**
Tank and cover only
 - **SW3056AT40**
WASHLET+ S550e

COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The two-piece ultra high-efficiency TORNADO FLUSH toilet shall be 1.0GPF/3.8LPF. Universal Height Toilet with CEFIONTECT glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be **TOTO Model MW4543056CUFG__#01**.

See TOTO Specification sheet **SW3056AT40** for details on required WASHLET.



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MW4543056CUFG(A)

Drake® II 1G® / WASHLET®+ S550e Two-Piece Toilet - 1.0 GPF

SPECIFICATIONS


- Water Use 1.0 GPF/3.8LPF
- Flush System TORNADO FLUSH®
- Min. Water Pressure 8 psi (static)
- Water Surface 6-3/4" x 8-5/8"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C454CUFGT40 57.3lbs.
ST453UA 28.0lbs.
SW3056AT40 16.3lbs.
- Shipping Dimensions C454CUFGT40
29" L X 14-3/4" W1 X
11-1/2" W2 X 16-1/4" H
ST453UA
18" L X 9" W X 16" H
SW3056AT40
23-3/4" L X 17" W X 9-1/2" H

- See Spec sheet **SW3056AT40** for WASHLET details

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

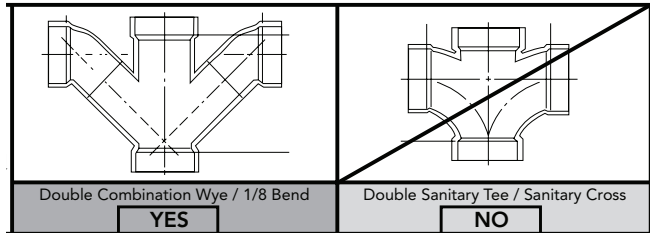


Install this product according to the installation guide.

Will comply with ADA when installed per Section 604 Water Closets and Toilet Compartments of the ADA 2010 Accessible Design Standard with seat height between 17" to 19", trip lever on approach side and flush actuation force of less than 5lbs.

Will comply with CSA B651 when installed per Clause 6.2.6 Toilets of the CSA 2012 Accessible Design Standard with seat height between 17" to 19", trip lever on approach side and flush actuation force of less than 5lbs.

**GFCI outlet of 120V, 10amps.
Washlet power cord is 4' long with 3 prongs.

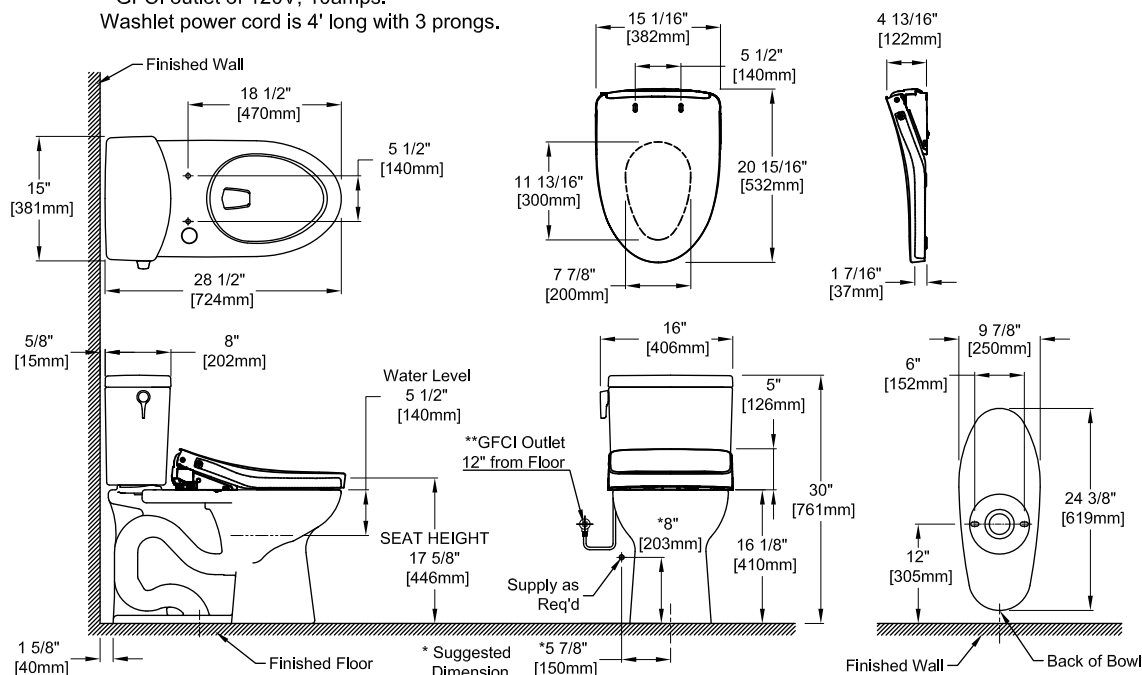

TOTO

These dimensions and specifications are subject to change without notice